




100% RECYCLABLE

Foam-pack®

**NON CROSSLINKED CLOSED CELL POLYETHYLENE
FOAM SHEET IN ROLLS**

- LOW DENSITY MATERIAL, LIGHT WEIGHT, FLEXIBLE
- ODORLESS
- WATER AND HUMIDITY RESISTANT
- POWDER FREE
- 100% RECYCLABLE

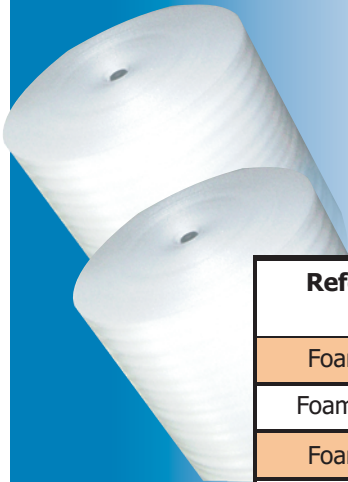

Reference	Meters/roll (m)	Thickness (mm)	Width (cm)	Density (kg/m ³)
Foam-pack 1	500 ± 10	1 ± 0,2	150 (-0/+5)*	20±5
Foam-pack 1,5	350 ± 14	1,5 ± 0,2	150 (-0/+5)*	20±5
Foam-pack 2	250 ± 10	2 ± 0,2	150 (-0/+5)*	20±5
Foam-pack 2,5	200 ± 8	2,5 ± 0,2	150 (-0/+5)*	20±5
Foam-pack 3	150 ± 6	3 ± 0,3	150 (-0/+5)*	20±5
Foam-pack 4	130 ± 5	4 ± 0,3	150 (-0/+5)*	20±5
Foam-pack 5	100 ± 4	5 ± 0,3	150 (-0/+5)*	20±5
Foam-pack 6	100 ± 4	6 ± 0,3	150 (-0/+5)	20±5
Foam-pack 7	50 ± 2	7 ± 0,4	100 (-0/+5)	30±5
Foam-pack 8	50 ± 3	8 ± 0,4	100 (-0/+5)	30±5
Foam-pack 10	41 ± 2	10,5 ± 0,5	100 (-0/+5)	30±5
Foam-pack 10SP	41 ± 2	10,5 ± 0,5	100 (-0/+5)	45±5
Foam-pack 12,5	41 ± 2	13 ± 0,5	100 (-0/+5)	30±5
Foam-pack 12,5 SP	41 ± 2	13 ± 0,5	100 (-0/+5)	45±5

*Also available in 120 cm width, others available under request.
Colour: white/black/pink. FR grade under request.
Antistatic grade: Foam-pack AS, please check datasheet in the website

Physical properties

	Foam-pack 3mm	Foam-pack 5mm	Foam-pack 10mm
Compression strength (Kpa):			
10%	9,25	7,26	15,58
25%	25,89	23,65	36,25
50%	77,06	71,78	90,46
Tensile strength (Kpa):			
Longitudinal	285,84	209,34	211,39
Transversal	102,26	107,82	165,28
Elongation at break (%):			
Longitudinal	46,23	72,90	105,06
Transversal	35,90	42,16	74,89



October 2007



OVERSEAS KONSTELLATION COMPANY, S.A.

O.K. COMPANY, S.A.
P.I La Serra II. Parcelas 3 a 7. 25320 Anglesola - Lleida - (Spain)
Tel: +(34)973308518 Fax: +(34)973308520 Fax Export: +(34)973308509
Web: www.okcompany.es / www.okcompanysa.com
E-mail infotec@okcompanysa.com / info@okcompanysa.com