


Roundex® HT






Crosslinked closed cell PE foam backer rod for hot pour sealant applications : highways, airport runways, parking lots, etc...

- Temperature resistance: -40°C up to +210 °C.
- Dimensional change <10% after sealant cooling.

Reference	Presentation	Meters/box	Diameter A (mm)	Density (kg/m3)
Roundex HT10	Roll	1150±45	10±1	25±5
Roundex HT13	Roll	750±30	13±1	25±5
Roundex HT15	Roll	550±25	15±1	25±5
Roundex HT20	Roll	350±15	20±1	25±5
Roundex HT25	Roll	200±8	25±1	25±5
Roundex HT30	Roll	160±8	30±1,5	25±5

Colour: white. Other sizes available under request.

Installation

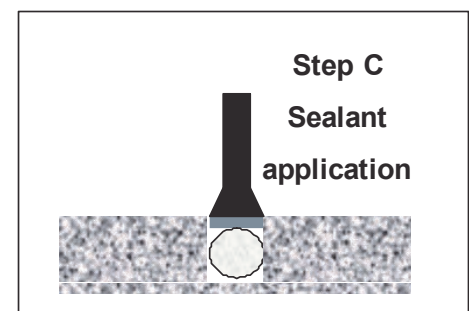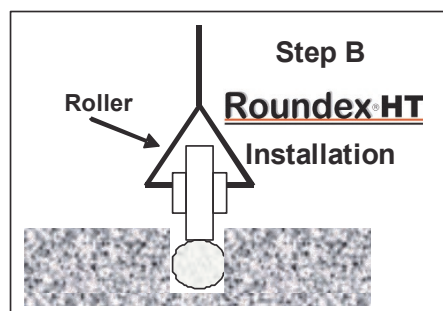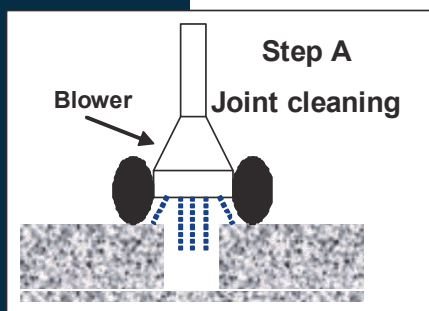

P.I. La Serra II. 25320 Anglesola—Lleida
Tlf: +34-973308518.

www.okcompany.com / infotec@okcompanysa.com



OVERSEAS KONSTELLATION
COMPANY S.A.